

TAMKO®

12-1/4 x 12 HIP and RIDGE

PRODUCT DATA



TAMKO® 12-1/4x12 HIP & RIDGE features a fiberglass mat coated on both sides with weathering-grade asphalt and surfaced with mineral granules. Also features a self-sealing strip of asphalt.

USES: Hip & Ridge forms a cap along various angles of the roof. For use with shingle products (strip and laminate).

- Each shingle is perforated into three pieces for separation prior to application.
- 10-year Algae Relief-Algae Cleaning Limited Warranty that provides for cleaning of discoloration caused by certain algae growth that may occur in areas with high humidity.

Shingles begin to age as soon as they are exposed to nature. Buildings experience aging factors differently, so it is difficult to predict how long shingles will last. That's why TAMKO provides a Limited Warranty. Go to TAMKO.com for details or call us at 1-800-641-4691.

CERTIFICATIONS/REPORTS

UL Listed for Class A Fire Rating:	UL 790/ASTM E 108, Class A
UL Classified for Wind Resistance:	ASTM D 3161, Class F
UL Classified in accordance with:	ASTM D 3462 and ICC-ES Acceptance Criteria AC438
UL Evaluation Reports:	UL ER2919-01 and UL ER2919-02
Florida Building Code Approved:	FL 1956
Miami Dade County Florida Approved:	NOA 13-0917.11 Expiration Date 01/08/2019


COLORS

HIP & RIDGE COLORS

- Aged Wood
- Black Walnut
- Olde English Pewter
- Rustic Evergreen
- Thunderstorm Grey
- Antique Wood
- Cabin Wood Brown
- Oxford Grey
- Rustic Redwood
- Virginia Slate
- Autumn Brown
- Cedar Wood
- Rustic Black
- Rustic Slate
- Weathered Wood
- Black Sage
- Natural Timber
- Rustic Cedar
- Slatetone Grey

PRODUCT DATA*

Shingle size	12-1/4" x 12"
Exposure	5-1/8"
Shingles per 100 lineal feet	234
Bundles per 100 lineal feet	3

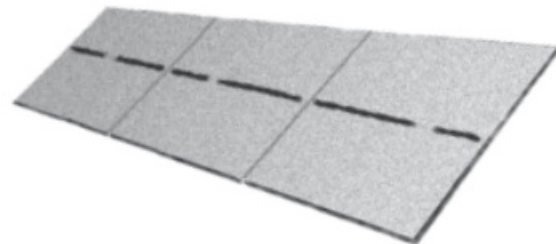

* All values stated as nominal

CAUTION: This product contains crystalline silica and formaldehyde. Crystalline silica and formaldehyde have been classified as "known" human carcinogens by the International Agency for Research on Cancer (IARC) and the National Toxicology Program. This product also contains oxidized asphalt. Occupational exposures to oxidized asphalt and its emissions during roofing have been classified by IARC as a "probable human carcinogen". Oxidized asphalt also contains Polycyclic Aromatic Hydrocarbons some of which have been classified by IARC as known or probable human carcinogens. The physical nature of this product may help limit any inhalation or dermal hazard during application and/or removal. However, physical forces such as sawing, grinding or drilling during demolition work and heating or burning may increase the inhalation or dermal exposure hazard of this product. Take precautions to prevent breathing and contact with skin.



TAMKO®

BUILDING PRODUCTS

TAMKO Logo, Heritage®, and TAMKO® are registered trademarks, and the Heritage Roofer Logo is a trademark of TAMKO® Building Products, Inc.



Construction Materials International, Inc

Address: 202 East 7th Avenue, Tampa, Florida 33602, USA
 Tel: (+1)813-287-8265 / Fax: (+1) 813-287-8144
 Email: sales@awg-llc.com / Web: www.cmi-us.com

Information included in this product data sheet was current at time of printing. To obtain a copy of the most current version of this product data sheet, visit us online at tamko.com or call us at 800-641-4691.