

# TAMKO® TAM-SEAL ROOF PATCH CEMENT- 10.5 oz. tube

PRODUCT DATA

A heavy bodied all-weather material formulated from select asphalts, penetrating petroleum solvents and tough reinforcing fibers. Contains special modifiers to enhance bonding to damp surfaces. Dries to a durable but pliable seal allowing for minor expansion and contraction. Bonds to all damp clean surfaces except coal tar base materials and slate. Acid and alkali resistant.

## 100% ASBESTOS FREE - GUARANTEED!

### USES

This tough material has multiple uses in new construction as well as maintenance and repair. Ideal for securing shingles or small projects to seal out moisture. Elastic, helps stop leaks.

### APPLICATION

Cut spout at an angle to desired bead size. Puncture seal at bottom of spout. 25 linear ft. per tube with 1/4" bead.

### PRODUCT DATA\*

PRODUCT NUMBER  
30001618 - 10.5 OZ - Columbus KS



### TYPICAL PHYSICAL PROPERTIES\*

	MIN	MAX
Total solids (non-volatiles), %	75	85
Volatiles, %	15	25
Flash point, °F	100	--
VOC, grams/litre	--	300

### SPECIFICATION COMPLIANCE


ASTM D 4586, Type I Standard Specification for Asphalt Roof Cement  
ASTM D 3409 Standard Test Method for Adhesion of Asphalt-Roof Cement to Damp, Wet or Underwater Surfaces

\*All values stated as nominal

For Technical Services call 1-800-641-4691

Visit our Web Site at [tamko.com](http://tamko.com)

CAUTION: This product contains crystalline silica. Crystalline silica has been classified as a "known" human carcinogen by the International Agency for Research on Cancer (IARC) and the National Toxicology Program. This product also contains cutback asphalt. IARC has classified "extracts of steam and air-refined bitumens" (cutback asphalt) as "possibly carcinogenic to humans." The physical nature of this product may help limit any inhalation or dermal hazard during application and/or removal. However, physical forces such as sawing, grinding or drilling during demolition work and heating or burning may increase the inhalation or dermal exposure hazard of this product. Take precautions to prevent breathing fumes and contact with skin.

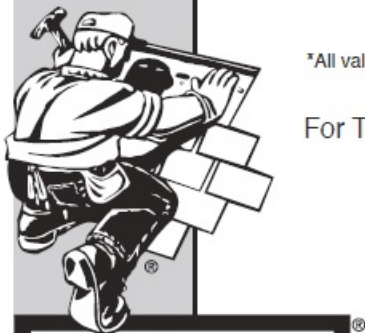

**TAMKO**  
BUILDING PRODUCTS

TAMKO Logo, Roofer Logo and TAMKO®  
are registered trademarks of  
TAMKO® Building Products, Inc.



### Construction Materials International, Inc.

Address: 202 East 7th Avenue, Tampa, Florida 33602, USA  
Tel: (+1) 813-287-8265 / Fax: (+1) 813-287-8144  
Email: [sales@awg-llc.com](mailto:sales@awg-llc.com) / Web: [www.cmi-us.com](http://www.cmi-us.com)

Information included in this product data sheet was current at time of printing. To obtain a copy of the most current version of this product data sheet, visit us online at [tamko.com](http://tamko.com) or call us at 800-641-4691.