

TAMKO® NO.30 Asphalt Saturated Organic Felt

PRODUCT DATA

Manufactured in Joplin, MO, Phillipsburg, KS,
Frederick, MD and Tuscaloosa, AL



TAMKO® NO. 30 SATURATED FELT features a
tough TAMKO organic felt (non-perforated) that
is saturated with asphalt.

USES


Accepted for use as an underlayment felt to be applied
over the deck prior to the installation of TAMKO asphalt
shingles.

CERTIFICATIONS

U.L. Prepared Roofing Accessory

PRODUCT DATA*

Roll Dimensions	72' X 36"
Coverage per roll	2 Squares
Laying Lines	2", 4", 17"

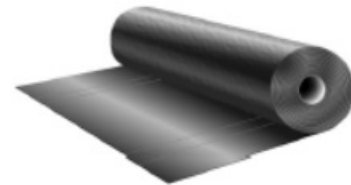

*All values stated as nominal

THIS PRODUCT IS SOLD "AS IS" WITHOUT WARRANTIES, EXPRESSED OR
IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR
FITNESS FOR A PARTICULAR PURPOSE.



CAUTION: The National Institute for Occupational Safety and Health (NIOSH) has con-
cluded that fumes of heated asphalt are a potential occupational carcinogen.
Do not heat or burn this product.

06/2013

TAMKO
BUILDING PRODUCTS

TAMKO Logo, Roofer Logo, and TAMKO®
are registered trademarks of
TAMKO® Building Products, Inc.



Construction Materials International, Inc

Address: 202 East 7th Avenue, Tampa, Florida 33602, USA
Tel: (+1)813-287-8265 / Fax: (+1) 813-287-8144
Email: sales@awg-llc.com / Web: www.cmi-us.com