



HERITAGE® shingles have a double-layer fiberglass mat construction with a random-cut sawtooth design. The two layers of mat are coated with asphalt, surfaced with mineral granules and then laminated together. They also include a self-sealing strip of asphalt.

USES: For application to roof decks with inclines of not less than 2 inches per foot. For slopes between 2 inches and 4 inches per foot, refer to application instructions for low slope.

- Rustic beauty of wood shakes.
- Shadowtone feature adds dimension, depth of appearance and curb appeal.
- 30-year Limited Warranty, 15-year FULL START, 5-year transferability.
- 15-year Limited Warranty for winds up to 110 mph, or up to 130 mph when applied in accordance with TAMKO's High Wind Application instructions.
- 10-year Algae Relief-Algae Cleaning Limited Warranty that provides for cleaning of discoloration caused by certain algae growth that may occur in areas with high humidity.

SHINGLES BEGIN TO AGE AS SOON AS THEY ARE EXPOSED TO NATURE. BUILDINGS EXPERIENCE AGING FACTORS DIFFERENTLY, SO IT IS DIFFICULT TO PREDICT HOW LONG SHINGLES WILL LAST. THAT'S WHY TAMKO PROVIDES A LIMITED WARRANTY, THAT INCLUDES A BINDING ARBITRATION CLAUSE AND OTHER TERMS AND CONDITIONS WHICH ARE INCORPORATED HEREIN BY REFERENCE. YOU MAY OBTAIN A COPY OF THE LIMITED WARRANTY AT TAMKO.COM OR BY CALLING 1-800-641-4691.

CERTIFICATIONS

UL Listed for Class A Fire Rating:	UL 790/ASTM E 108, Class A
UL Classified for Wind Resistance:	ASTM D 7158, Class H and ASTM D 3161, Class F
UL Classified in accordance with:	ASTM D 3462 and ICC-ES Acceptance Criteria AC438
UL Evaluation Reports:	UL ER2919-01 and UL ER2919-02
Florida Building Code Approved:	FL 18355
Miami Dade County Florida Approved:	NOA 15-0709.19 Expiration Date 12/01/2020

COLORS

AMERICA'S NATURAL COLORS


- Autumn Brown
- Black Walnut
- Natural Timber
- Thunderstorm Grey

CLASSIC HERITAGE COLORS

- Aged Wood
- Olde English Pewter
- Oxford Grey
- Rustic Black
- Rustic Cedar
- Rustic Evergreen
- Rustic Redwood
- Rustic Slate
- Slatetone Grey
- Virginia Slate
- Weathered Wood

PRODUCT DATA†

Shingle size	13-1/4" x 39-3/8"
Exposure	5-5/8"
Coverage per Sales Square††	98.4 sq.ft.
Shingles per Sales Square††	64
Bundles per Sales Square††	3

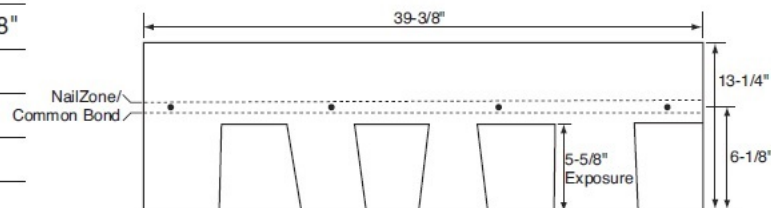

† All values stated as nominal. †† When applied according to instructions.

CAUTION: This product contains crystalline silica and formaldehyde. Crystalline silica and formaldehyde have been classified as "known" human carcinogens by the International Agency for Research on Cancer (IARC) and the National Toxicology Program. This product also contains oxidized asphalt. Occupational exposures to oxidized asphalt and its emissions during roofing have been classified by IARC as a "probable human carcinogen". Oxidized asphalt also contains Polycyclic Aromatic Hydrocarbons some of which have been classified by IARC as known or probable human carcinogens. The physical nature of this product may help limit any inhalation or dermal hazard during application and/or removal. However, physical forces such as sawing, grinding or drilling during demolition work and heating or burning may increase the inhalation or dermal exposure hazard of this product. Take precautions to prevent breathing and contact with skin.

TAMKO Logo, Heritage, and TAMKO are registered trademarks of TAMKO Building Products, Inc.



Construction Materials International, Inc
Address: 202 East 7th Avenue, Tampa, Florida 33602, USA
Tel: (+1)813-287-8265 / Fax: (+1) 813-287-8144
Email: sales@awg-llc.com / Web: www.cmi-us.com