


# TAMKO® FIBERED ROOF COATING

PRODUCT DATA

A semi-mastic material consisting of select asphalt, mineral stabilizers, petroleum solvents and special fibers. Primarily used on all types of low sloped roof surfaces with the exception of coal tar based roofing. Acid and alkali resistant.

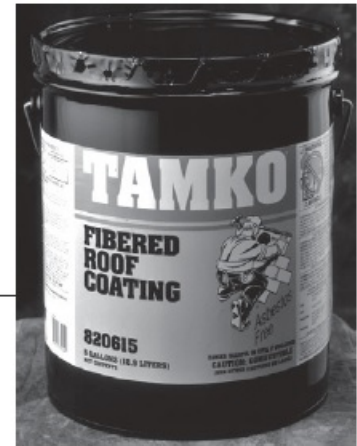

PRODUCT NUMBER  
30001280 - 1 GAL - Green Cove Springs FL  
30001646 - 1 GAL - Columbus KS  
30001281 - 5 GAL - Green Cove Springs FL  
30001647 - 5 GAL - Columbus KS

## USES

**100% ASBESTOS FREE - GUARANTEED!**

Provides needed additional weathering protection for membrane surfaces. Used on existing roofs to increase life expectancy and new roofs after suitable weathering.

## APPLICATION

Apply with a roofer's brush or spray equipment. Can be applied at temperatures as low as 50°F when kept at room temperature prior to use. Application rates include:

Composition Roofing	2 to 3 gallons per 100 sq. ft.
Metal Surfaces	1 to 1-1/2 gal per 100 sq. ft.
Concrete/Masonry	3 to 4 gallons per 100 sq. ft.

## PRODUCT DATA\*

### TYPICAL PHYSICAL PROPERTIES\*

	<u>MIN</u>	<u>MAX</u>
Total solids, (non-volatiles), %	50	--
Mineral and other stabilizers, %	5	20
Flash point, °F	100	--
VOC, grams/litre	--	300
Viscosity, Stormer/100 rev. @77°F, seconds	50	90

### SPECIFICATION COMPLIANCE:

ASTM D 4479 Standard Specification for Asphalt Roof Coating

\*All values stated as nominal

For Technical Services call 1 -800-641-4691

Visit our Web Site at [tamko.com](http://tamko.com)



**TAMKO**  
BUILDING PRODUCTS

TAMKO Logo, Roofer Logo and TAMKO® are registered trademarks of TAMKO® Building Products, Inc.

CAUTION: This product contains crystalline silica. Crystalline silica has been classified as a "known" human carcinogen by the International Agency for Research on Cancer (IARC) and the National Toxicology Program. This product also contains cutback asphalt. IARC has classified "extracts of steam and air-refined bitumens" (cutback asphalt) as "possibly carcinogenic to humans." The physical nature of this product may help limit any inhalation or dermal hazard during application and/or removal. However, physical forces such as sawing, grinding or drilling during demolition work and heating or burning may increase the inhalation or dermal exposure hazard of this product. Take precautions to prevent breathing fumes and contact with skin.



**Construction Materials International, Inc.**

Address: 202 East 7th Avenue, Tampa, Florida 33602, USA

Tel: (+1) 813-287-8265 / Fax: (+1) 813-287-8144

Email: [sales@awg-llc.com](mailto:sales@awg-llc.com) / Web: [www.cmi-us.com](http://www.cmi-us.com)

Information included in this product data sheet was current at time of printing. To obtain a copy of the most current version of this product data sheet, visit us online at [tamko.com](http://tamko.com) or call us at 800-641-4691.